

GSE
Intégration

GSE IN-ROOF SYSTEM™

BIPV SYSTEM FOR ALL PHOTOVOLTAIC MODULES

+ 6 000 000 m²
ALREADY
INSTALLED

QUICK, AESTHETIC, LIGHTWEIGHT,
WATERPROOF AND COST-COMPETITIVE



MADE IN FRANCE

www.gseintegration.com

The GSE **IN-ROOF SYSTEM** range is expanding

MODULES UP TO 400 Wp **2012 AND 2020 RANGE**

MODULES UP TO 600 Wp **2022 RANGE**


PORTRAIT:



19 available references*

Module length: 1535 to 1780 mm
Module width: 803 to 1055 mm

LANDSCAPE:

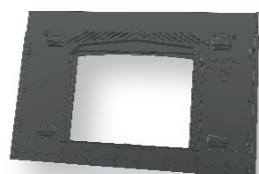

21 available references*

Module length: 1554 to 1740 mm
Module width: 768 to 1120 mm

UP TO 450 Wp:



21 available references*

Module length: 1610 to 1990 mm
Module width: 990 to 1160 mm

UP TO 600 Wp:

NEW PORTRAIT FRAMES FOR XXL PV MODULES !

5 available references*

Module length: 1990 to 2180 mm
Module width: 991 to 1305 mm

* Detailed list available on our website: www.gseintegration.com

BENEFITS

- Economic: the most competitive system for roof renovations and new constructions
- Easy to install: 10 to 16 panels installed in 6 hours
- Flexible: achieve any desired configuration type (U-Shape, pyramid, etc...)
- Lightweight and space-saving: 58 frames per pallet

PRODUCT CERTIFIED IN MANY COUNTRIES

- Resistance to fire
- Completely waterproof: ensures complete watertightness of the PV system and the roof
- Optimal ventilation
- Impact resistance
- Very important mechanical resistance:
Downward pressure: 5400 Pa (IEC 61215)
Upward pressure: up to 5500 Pa (NF EN 12179)
Eurocode design values: Snow: 1800 Pa, Wind: 1700 Pa

TECHNICAL SPECIFICATIONS



NEW: EVEN EASIER TO INSTALL

Integration of all new PV modules generations. Until 150 mm of height adjustment possible

Pre-drilled fixing points

Simplified clamps installation: position indication

Optimized cable passaged for all junction boxes

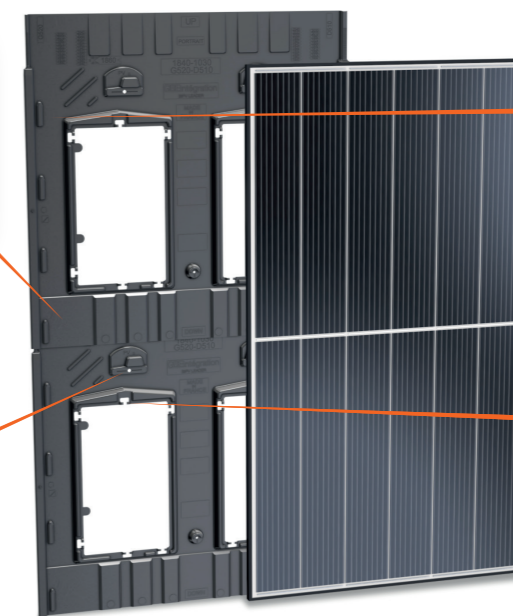

All types
Roof covering



Slope
12° to 50°



Weight
2.8 to 3.7 kg/m²












Temperature range
-30°C to 100°C



Material
PP - Aluminium - Stainless steel
(100% Recyclable)

CERTIFICATIONS

-   ■ Universel kit: ALPES CONTROLE: ETN A27T2109 Many modules approved (list available on our website)
-   ■ Avis Technique n°21/16-57_V5 7
GSE Intégration "Toit Solaire" V. TS-2, A-2 et TN-1
-   ■ BBA: MCS 012 certifiée no. "MCS BBA 0156" -
compatible with more than 30 PV panels - maximum wind load: 2.71 kN/m²
-   ■ System Performance Assessment (certification in progress)
-  ■ DIBt: Allgemeine bauaufsichtlichen Zulassung no. Z-14.4-817 (certification in progress)

FIRE TESTS EXPOSURE

- BRoof T1   
- BRoof T2    
- BRoof T3 
- BRoof T4 

GSE

Intégration

OUR TIME-SAVING TOOLS

CALCULATOR

Allows you to find out which GSE IN-ROOF SYSTEM plate is compatible with your panel and to determine the overall size of the final PV field in just a few clicks.

CONFIGURATOR

Allows you to establish a list of materials needed for your GSE IN-ROOF SYSTEM installation.

INSTALLATION MANUALS AND GUIDES

Find these tools here:



A DEDICATED CONTACT PERSON FOR EACH REQUEST

A battening plan or a technical question? technical.support@gseintegration.fr

Any other request? contact@gseintegration.fr