



mounting systems



LightX-Speed ProLine

Application	Flat roof
Roofing	For all roof coverings (except green roof)
Roof inclination	Up to 5°
Building height	Max. 25 m
Module width	1134 mm / +- 1mm
Module length	Up to 2400 mm
Module inclination	10°
Supporting profiles	Aluminium (EN AW 6063 T66)
Lightning protection and potential equalisation	Dehn clamps In process to be certified
Small parts	Stainless steel (V2A)
Color	Aluminium: Natural
Unique selling points	pre-assembled rails; three screws for mounting the rails; no connecting rails; universal protection mats with ballast tray replacement function;
Warranty	10 years



Flat Roof



East West Orientation




Framed Module




Frameless Module




Orientation Landscape

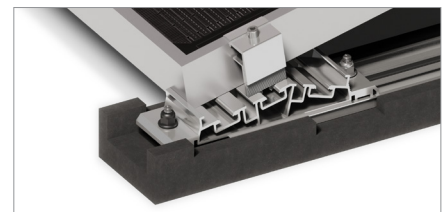

Detail front support

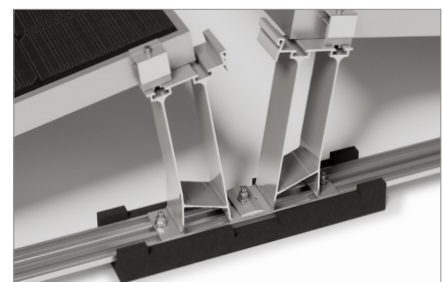

Detail support

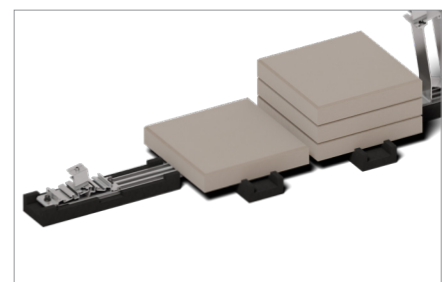

Universal protection mat

