




# SUNSYNK BUSBAR

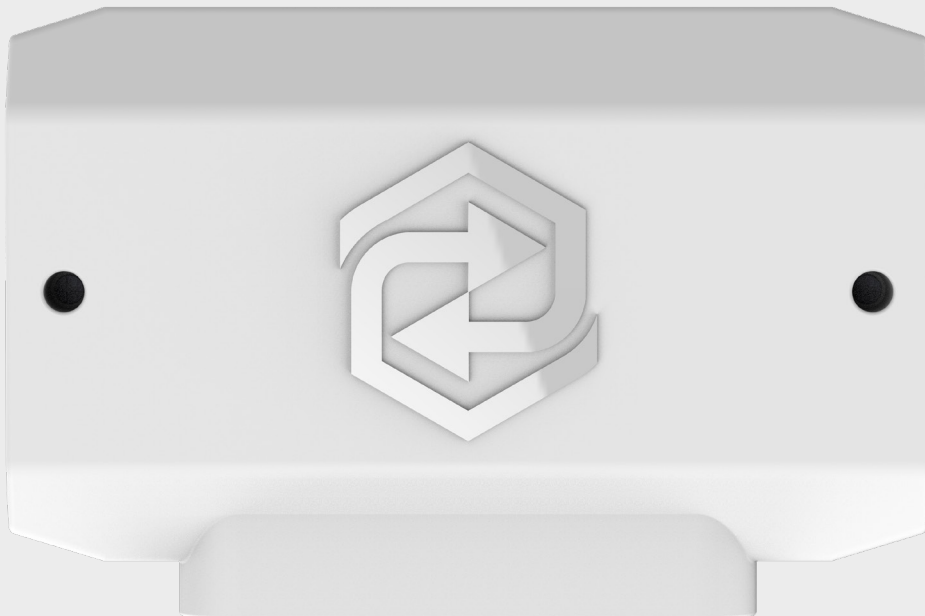

## DATASHEET

SUNSYNK-BB-300


[www.sunsynk.com](http://www.sunsynk.com)  
[sales@sunsynk.com](mailto:sales@sunsynk.com)  
[customerservices@sunsynk.com](mailto:customerservices@sunsynk.com)


<b>Model</b>	<b>SUNSYNK-BB-300</b>
<b>Power</b>	
Voltage Range	9 - 60Vdc
Current Rating	800A
<b>Connections</b>	
Busbar	M8
<b>Physical</b>	
Enclosure Material	ABS
Enclosure Dimensions (H x W x D)	165 x 245 x 75mm
Unit Weight	1.8kg
Busbar Material	Tinned Copper
Busbar Dimensions (H x W)	8 x 30mm
<b>Environmental</b>	
Operating Temperature Range	-40°C - +60°C
Storage Temperature Range	-40°C - +60°C
Humidity	Max. 95% (Non-condensing)
Protection Class	IP22




## CONTACT US

 **Call us:** +44 151 832 4300 **Email us:** [sales@sunsynk.com](mailto:sales@sunsynk.com)

 **HK Address:** Room 702-704, 7/F Texwood Plaza,  
6 How Ming Street, Kwun Tong, Kowloon, Hong Kong.

 **UK Address:** Sunsynk, 17 Turnstone Business Park,  
Mulberry Avenue, Widnes, Cheshire, WA8 0WN.

 **SA Address:** Globaltech Sunsynk South Africa (Pty) Ltd,  
Unit 2 Highview Boulevard, Ferndale 2194.

 **EU Address:** Sunsynk EU, Henri Wijnmalenweg 8,  
5657 EP Eindhoven, Netherlands.

GlobalTech Ltd

 **ena**  
energy networks  
association



 **SGS**

 **UK  
CA CE**

Powered by  
SUN SYNK