



SUNSYNK-L3.0



DATASHEET

Room 702-704, 7/F Texwood Plaza, 6 How Ming Street,
Kwun Tong, Kowloon, Hong Kong

Tel: +852 2884 4318 Fax: +8522884 4816

www.sunsynk.com / sales@sunsynk.com

Model		SUNSYNK-L3.0
Main Parameter		
Battery Chemistry		Lithium Ferro Phosphate (LifePO4 or LFP)
Capacity		60 Ah
Scalability		Max. 4 pcs in parallel (12kWh)
Nominal Voltage		51.2 V
Operating Voltage		43.2~57.6 V
Energy		3.07 kWh
Usable Energy ^[1]		2.76 kWh
Charge/Discharge Current	Recommend ^[2]	30 A
	Max. ^[2]	60 A
	Peak (2mins,25°C)	75 A
Other Parameter		
Recommend Depth of Discharge		90%
Dimension (W/H/D)		440*520*145 mm (don't include Circuit Breaker, terminals and hanging boards)
Weight Approximate		30 kg
Master LED Indicator		5 LED (SOC 20%~100%)
		3 LED (working, alarming, protecting)
IP Rating of Enclosure		IP65
Working Temperature		Charge: 0°C~+55°C (optional heating, -20°C~+55°C) Discharge: -20°C~+55°C
Storage Temperature		-20°C ~ +35°C
Humidity		5% ~ 95%
Altitude		≤2000m
Cycle Life		≥6000 (25±2°C, 90%DOD, 0.5C/0.5C, 70%EOL)
Installation		Wall Mounted (Support 19-inch standard cabinet)
Communication Port		CAN2.0, RS485
Life Cycle Power During Warranty Period ^[3]		10MWh@70%EOL
Certification		IEC62619, CE, UK, CEC, UN38.3


^[1] DC Usable Energy, test conditions: 90% DOD, 0.5C charge & discharge at 25° C. System usable energy may vary due to system configuration parameters.

^[2] The current is affected by temperature and SOC.

^[3] The warranty is due whichever reached first of warranty period or energy throughout.



DC 80A Circuit Breaker

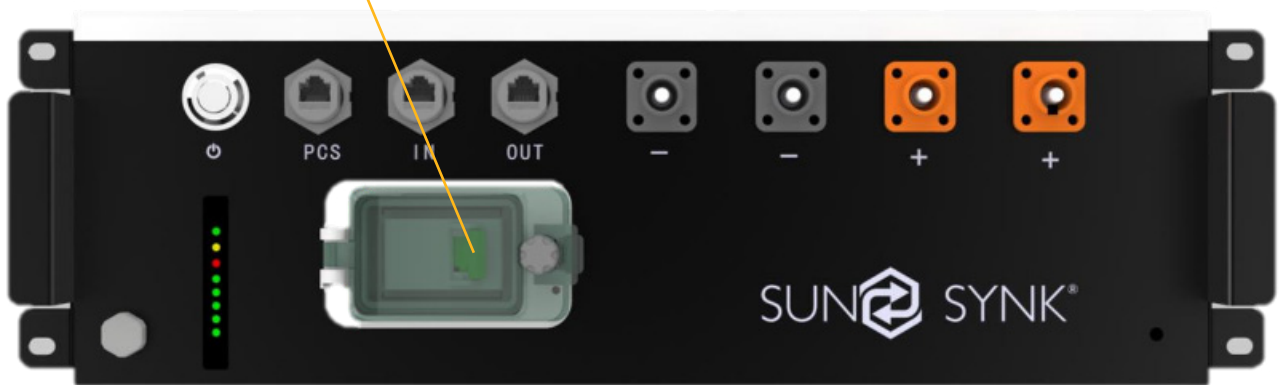



CONTACT US

Email us: sales@sunsynk.com **Call us UK:** +44 151 832 4300

VAT Number: 175669460

UK Address: Sunsynk, 17 Turnstone Business Park,
Mulberry Avenue, Widnes, Cheshire, WA8 0WN.

GlobalTech^{Ltd}



Powered by
SUN SYNK