




mounting
systems

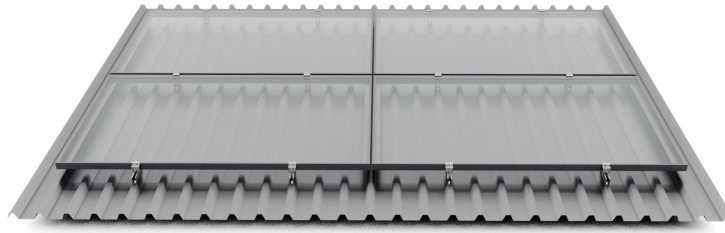

Trapeze ProLine

Application	On-roof
Roof cladding	Trapezoidal sheet
Min. sheet thickness	Steel: 0.4 mm Aluminium: 0.4 mm
Roof slope	From 5° to 45°
PV-Modules	Framed
Module orientation	Portrait, landscape
Distance of the fixing points	Depends on wind or snow loads
Supporting profiles	Extruded aluminium profiles (EN AW 6063 T66)
Fixation	Thin sheet screw 5.5 x 25 mm, TX30
Small parts	Stainless steel (V2A)
Color	Aluminium: blank finish
Certificates	MCS BBA 0194
Warranty	10 Years



On-roof



Framed modules




Landscape orientation




Portrait orientation



Trapezoidal sheet




1/16




4/40

Landscape orientation

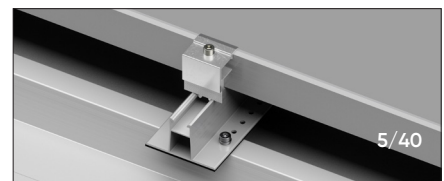

5/40

Portrait orientation

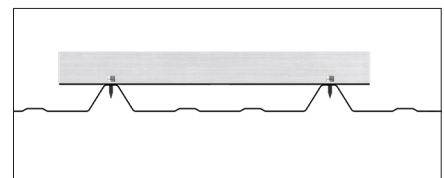

Fixation of the thin sheet screw for 5/40



For further information: www.mounting-systems.com
Subject to technical changes.
2023 © Mounting Systems GmbH