

Hallhook Specification

Product Name: Hallhook™

Product Code: HHK001 (Pack of 10 with 1 Hookpull)

Patent Number: GB2473637

Commodity Code: 73182900


Material: Stainless Spring Steel, Grade 302

Dimensions: 2.3mm thickness, 200mm length, 70mm width

Purpose: Device allows you to repair a broken slate, as; you cannot access the nail holes.

As well as general slate repair they are used during Solar Panel bracket mounting, roof light/window/slate vent installation and are widely used on conservation and heritage buildings

Country of Manufacturer: United Kingdom

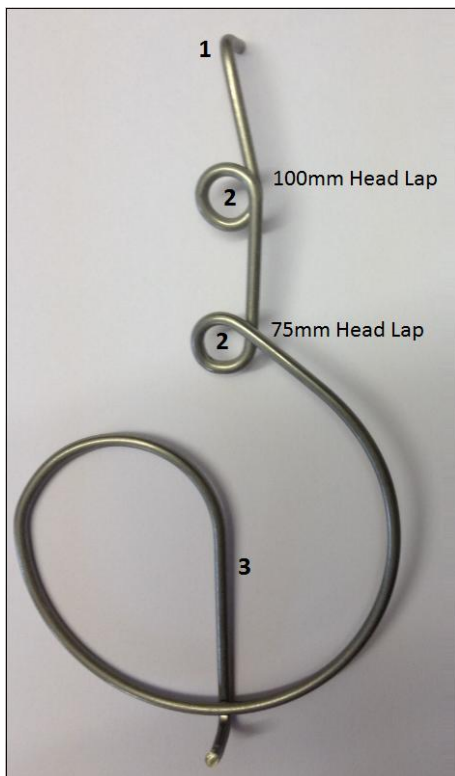

Additional Information

- Position **1** fits between the slates. Once nail fixing is applied at position **2** this provides a vertical line to position **3** and prevents lateral movement
- Two nail fixings are offered. The nail fixing to be used is dependent on size of the slate head lap.
 - Use the bottom nail hole for a head lap of 75mm (3 inch)
 - Use the top nail hole for a head lap of 100mm (4 inch) (The top nail hole can also be used for slates with a 125mm (5 inch) head lap)
- The Hallhook™ is only compatible with Hip Holed Slates

Tool for installation: Hookpull

Product Name: Hookpull

Product Number: NA (Not sold separately)

Material: Stainless Spring Steel, Grade 302

Dimensions: 1.5mm thickness, 145mm length

Purpose: Attach the smaller circle to the bottom of the Hallhook™, pull down on the Hallhook™ and hook the bottom of the Hallhook™ onto the object slate, holding it in position.

Country of Manufacturer: United Kingdom

